



U-clamp for pipes, shape A

short name: BUE*

DIN 3570






technical product sheet

DN	D	d	L	l1	A	M	kg	Art.-Nr.
15	21,3	25	65	35	35	10	0,068	BÜ-021-000
20	26,9	30	70	40	40	10	0,075	BÜ-026-000
25	33,7	38	76	40	48	10	0,094	BÜ-033-000
32	42,4	46	86	50	56	10	0,095	BÜ-042-000
40	48,3	52	92	50	62	10	0,103	BÜ-048-000
50	60,3	64	109	50	76	12	0,178	BÜ-060-000
65	76,1	82	125	50	94	12	0,210	BÜ-076-000
80	88,9	94	138	50	106	12	0,229	BÜ-088-000
100	114,3	120	171	60	136	16	0,530	BÜ-114-000
125	139,7	148	191	60	164	16	0,611	BÜ-139-000
150	168,3	176	217	60	192	16	0,695	BÜ-168-000
175	193,7	202	249	60	218	16	0,797	BÜ-193-000
200	219,1	228	283	70	248	20	1,391	BÜ-219-000
250	273,0	282	334	70	302	20	1,693	BÜ-273-000
300	323,9	332	385	70	352	20	1,940	BÜ-323-000
350	355,6	378	435	70	402	24	3,000	BÜ-355-000
400	406,4	428	487	70	452	24	3,000	BÜ-406-000
500	508,0	530	589	70	554	24	4,260	BÜ-508-000
600	609,6	630	695	100	654	24	5,080	BÜ-609-000

available material: 1.4301, 1.4401

Installation supplies › U-clamps › DIN 3570, shape A

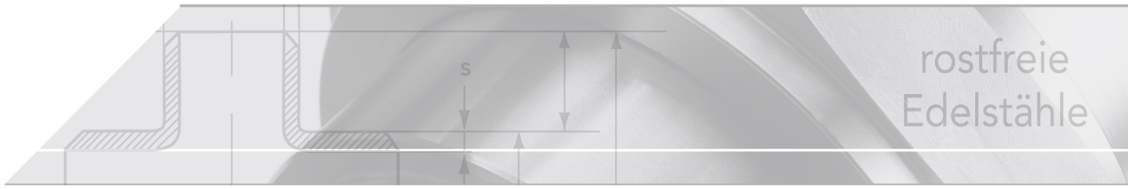



U-clamp for pipes

Design
acc. to DIN 3570, shape A
made of stainless steel
Ends smoothly sheared off
Thin shaft with rolled threat
Surface not washed or pickled
Scope of supply: No accessories (nuts must also be explicitly ordered)

These clamps are mounted up to DN 50 with two nut, and all larger diameters with four nuts.

